



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A45D 40/18	A1	(11) International Publication Number: WO 99/20149 (43) International Publication Date: 29 April 1999 (29.04.99)
(21) International Application Number: PCT/US98/21933 (22) International Filing Date: 20 October 1998 (20.10.98) (30) Priority Data: 08/955,202 21 October 1997 (21.10.97) US (71) Applicant: COLOR ACCESS, INC. [US/US]; 7 Corporate Center Drive, Melville, NY 11747 (US). (72) Inventor: BOUIX, Herve, F.; 245 E. 54th Street, New York, NY 10022 (US). (74) Agent: TSEVDOS, Estelle, J.; Kenyon & Kenyon, One Broadway, New York, NY 10004 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: AIRTIGHT COSMETIC CASE WITH BELLOWS (57) Abstract The present invention is an airtight case comprising a base for receiving a stick-type product, a hollow cap (2), and a hollow plug sleeve (3) inserted within the cap (3). The plug sleeve (3) has an open end and a closed end, the closed end being a flexible bellows (4). This case is useful in reducing the adverse effects caused by the pressure build-up associated with sealing or airtight cases. When the cap (2) of the present invention is placed on the base of the case (2) the bellows (4) expands in response to the compressing of the air located within the inner chamber of the case, thus preventing the cap from being pulled away from the base. Also, when the cap (2) is removed, the bellows (4) contracts and prevents the product from being pulled out of the base.		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

AIRTIGHT COSMETIC CASE WITH BELLOWS

FIELD OF THE INVENTION

5 The present invention relates to a sealing or airtight case for stick products that aids in the release of internal pressure formed when the cap is placed on, and removed, from the case.

BACKGROUND OF THE INVENTION

10 It is desirable to have stick-type products that contain a volatile solvent because the volatile solvent provides for a better "feel" of the product when applied to the skin, and allows the product to dry or set quickly. The problem encountered with these types of formulations is that they readily lose the volatile solvent contained within their composition due to evaporation from the product.

15 The loss of a volatile solvent from a stick-type product can adversely affect the physical properties of the product as well as reduce the amount of volatile delivery. Even when not stored above room temperature, it has been noted that there is loss of the volatile solvent over time.

Prior art cases have tried to remedy this problem by providing a sealed case (see US Patents 5,197,814 and 5,342,134). This case provided for the
20 insertion of a flexible sleeve into the cover of the case. When the cover is placed on the base of the case the flexible sleeve makes contact with an outer wall of the base and effectively seals the case and its contents from volatile loss. The flexibility of the sleeve, as described in this invention, is for the purpose of making a seal between the base of the case and the cover, whereby
25 the sleeve flexes around any minor defects on the surface of the base and makes a seal.

The problem with these types of cases is that, although the case does effectively create a seal between the internal chamber and the external environment, a pressure build-up is experienced. This build-up of pressure is
30 created through the compression of the air contained within the case when the cover is applied.

This compression of the air in the case creates a number of unappealing effects. First, when the cover is applied the compression of the air causes a back-pressure which pushes the cover away from the base. This creates a gap between the cover and the base which is not aesthetically appealing and which
5 reduces the effectiveness of the seal between the base and the cover.

Modifications can be made to eliminate this problem, for example, reducing the internal diameter of the cover to create a tighter fit between the cover and the base. This, in turn, makes the cover more difficult to remove from the base, which is unacceptable to consumers.

10 The tighter fit of the cover eliminates the problem of the back-pressure moving the cover away from the base, but in addition to the greater force required to remove the cover, additional drawbacks are encountered. With the cover in place, the pressure build-up within the internal chamber of the case will slowly dissipate through micro-leaks and equilibrate to that of the external
15 environment. This is not an immediate occurrence. The cases will be filled, stored in a warehouse, and then shipped to the counter for consumer purchase. Dissipation of the internal pressure will occur over the time it takes the filled case to reach the consumer, which can take months.

20 With the internal pressure equal to that of the external environment, removal of the cover causes a depressurizing of the internal chamber. This creates a suction effect which will "pull" on the product and the internal components of the case. This suction will cause the product to either dislodge from the holder, or fracture, thus making the product unusable by the consumer.

25 This invention provides a case for a volatile solvent-containing stick-type product that aids in preventing the loss of the volatile solvent from the stick-type product.

This invention also provides a case that aids in preventing the undesirable effects associated with pressure build-up and dissipation within sealed cases.

30 This invention further provides a case for a volatile solvent-containing stick-type product wherein most components of the existing standard cases can still be employed thereby minimizing package re-tooling costs.

Further, this invention provides a case for a volatile solvent-containing stick-type product that prevents the loss of the volatile solvent from the stick-type product while at the same time being a relatively simple device that avoids interference with the package aesthetics.

5

SUMMARY OF THE INVENTION

The present invention is an airtight case comprising a base for receiving a stick-type product, a hollow cap, and a hollow plug sleeve inserted within the cap. The plug sleeve has an open end and a closed end, the closed end being a flexible bellows.

10

This case is useful in reducing the adverse effects caused by the pressure build-up associated with sealing or airtight cases. When the cap of the present invention is placed on the base of the case the bellows expands in response to the compressing of the air located within the inner chamber of the case, thus preventing the cap from being pulled away from the base. Also, when the cap is removed, the bellows contracts and prevents the product from being pulled out of the base.

15

20

BRIEF DESCRIPTION OF THE DRAWING

Further objects, features and drawings of the present invention will better be understood in light of the embodiment examples which are discussed below with the aid of a drawing wherein:

25

FIGS. 1A and 1B are cross-sectional views showing the operation of the cap of the present invention.

FIG. 2 is a cross-sectional view of a plug sleeve having a smooth inner wall.

FIG. 3 is a side view of a plug sleeve with grooves in the outer wall.

30

FIG. 4 is a side view of a plug sleeve having a post.

FIG. 5 is a cross-sectional view of a plug sleeve having sealing rings disposed on the inner wall.

DETAILED DESCRIPTION OF THE INVENTION

A system has been devised which aids in reducing the adverse effects of pressure build-up within a sealing or airtight case when the cap is placed on the case. These sealing or airtight cases are used to prevent the loss of a volatile solvent from a volatile solvent-containing stick product. A "volatile solvent" is any liquid product that possesses a substantial or significant vapor pressure at or around ambient temperature (such as water, volatile oils, volatile silicones, and volatile alcohols).

As seen in FIG. 1A, this invention is a case which comprises a base 1, a hollow cap 2 fitting over base 1, and a flexible plug sleeve 3 having a bellows 4 inserted within hollow cap 2. This invention can be configured for use with any lipstick case, deodorant case, or any other case that houses a stick product. Adaptation of the cases can be achieved through simple modifications whereby a flexible sleeve having a bellows is secured within a hollow cap.

The base 1 and the hollow cap 2 of the present invention are constructed of relatively hard materials such as polypropylene, ABS (acrylonitrile-butadiene-styrene), SAN (styrene-acrylonitrile), or combinations of ABS with SAN. Metallic material may also be used for the base and cap. Brass or chrome plated metal are particularly preferred.

Tightly fitting within the hollow cap is a flexible plug sleeve 3, as seen in FIG. 2. According to the first embodiment of this invention, plug sleeve 3 has a smooth inner wall 5 and a bellows 4 at the closed end. Preferably, plug sleeve 3 is dimensioned so as to extend at least half way down the length of cap 2, as seen in FIGS. 1A and 1B. The smooth inner wall 5 of plug sleeve 3 is used as a sealing surface. Inner wall 5 contacts base 1 and forms a seal between internal chamber 10 of the case and the external environment (see FIGS. 1A and 1B).

Preferably, bellows 4 at the closed end of plug sleeve 3 is an integral part of plug sleeve 3 (i.e., the same material). Bellows 4 is shaped and formed so as to be able to expand and contract when the cap is placed on and removed from base 1. This action can be seen in FIGS. 1A and 1B. In a

preferred embodiment, bellows 4 is in the shape of an accordion and has a smaller diameter than that of plug sleeve 3.

An important feature of the present invention is that plug sleeve 3 is formed of a material which can easily be molded in the form of a bellows 4, and is more flexible than the material forming cap 2. First, flexibility is needed in order to allow plug sleeve 3 to elastically engage base 1 of the of the case, thereby making a seal. Second, flexibility is required so that bellows 4 will be able to expand and contract when exposed to pressure. Plastic materials and the like are suitable for use with the present invention. Preferred materials are polyethylene, polypropylene, polyethylene terephthalate, and elastomers. In a most preferred embodiment low density polyethylene is used. The dimensions required to enable bellows 4 to expand and contract will be dependent on the material chosen for plug sleeve 3.

The manufacturing of plug sleeve 3 can be accomplished by any number of conventional plastic molding methods, which are known in the art. One such method of manufacture is blow molding. Other methods include injection molding, injection-blow molding, dipping processes, and the like, the choice depending on the chosen material.

Placement of plug sleeve 3 within cap 2 is important. When assembling the case, plug sleeve 3 is positioned within cap 2 so that bellows 4, at its maximum point of expansion, will not reach the closed end of cap 2. Plug sleeve 3 also needs to be positioned so that bellows 4 will not contact the product during expansion or contraction.

When cap 2 and plug sleeve 3 of the present invention are placed on base 1 of a case, inner wall 5 of plug sleeve 3 elastically engages base 1 and makes a seal. With this sealing of the case, the air in space 20 between the inner wall of cap 2 and plug sleeve 3 is compressed and pushes at plug sleeve 3, causing bellows 4 to expand. The expansion of bellows 4 will cause the air in space 20 between cap 2 and plug sleeve 3 to compress, thus creating a back-pressure that will push bellows 4 to its original position. This is particularly so if the inner wall of cap 2 and the outer wall of plug sleeve 3 are smooth. Therefore, to alleviate this pressure between cap 2 and plug sleeve 3,

one or more longitudinal grooves 7 along the external wall of plug sleeve 3, or along the inner wall of cap 2, or both, are provided (see FIG. 3). Longitudinal grooves 7 are positioned in cap 2 or plug sleeve 3 so that each groove 7 will extend from bellows 4 to the open end of plug sleeve 3. This will form a channel which will allow the air 20 trapped between cap 2 and plug sleeve 3 to escape to the external environment.

If, however, cap 2 is fluted or ribbed, groove 7 will not be needed. This is because the flutes or ribs will create a natural channel between bellows 4 and the inner wall of cap 2, thus allowing the air 20 to flow easily to the external environment.

A second embodiment of the present invention, as seen in FIG. 4, employs a plug sleeve 3 having a slightly different configuration than that of the first embodiment. The second embodiment has the bellows 4 offset or narrower than plug sleeve 3. This narrower or offset configuration will provide a ledge 15. Provided on ledge 15 are one or more posts 16, which extend beyond the expanded length of bellows 4. Post 16, like bellows 4, is part of plug sleeve 3 and is formed during the molding process.

Post 16 is provided for the positioning of plug sleeve 3 within cap 2 during the assembly process. Since post 16 extends past the expanded bellows 4, post 16 will contact the closed end of cap 2 before bellows 4. This will allow plug sleeve 3 to be inserted to a point where bellows 4, at its maximum point of expansion, will not contact the closed end of cap 2.

In a further embodiment, one or more sealing rings 30 are positioned on inner wall 5 of plug sleeve 3, between the open and closed ends (see FIGS. 1A, 1B, and 5). Sealing ring 30 is fashioned as a circumferentially inwardly projecting ledge that is molded as part of plug sleeve 3. Sealing ring 30 functions in place of the sealing surface of the smooth inner wall 5 of plug sleeve 3. The use of a sealing ring 30 becomes important when aesthetic considerations of the case make sealing at the base very difficult. The use of a sealing ring 30 allows the case to be sealed with the same airtightness as the smooth inner wall 5, the difference being the location of the seal.

The foregoing descriptions illustrate selective embodiments of the present invention. In light thereof, various modifications will be suggested to one skilled in the art, all of which are within the scope and spirit of this invention.

What is claimed is:

1. A plug sleeve for use in a cosmetic container cap comprising:
a hollow housing having an open end, a closed end, an inner wall, and an outer wall, the closed end being a flexible bellows.
2. A plug sleeve according to claim 1, which is composed of a plastic material.
3. A plug sleeve according to claim 2, which is composed of polyethylene.
4. A plug sleeve according to claim 2, which is composed of low density polyethylene.
5. A plug sleeve according to claim 1, which has a smooth inner wall.
6. A plug sleeve according to claim 1, wherein one or more sealing rings are positioned on the inner wall of the plug sleeve between the open end and closed end.
7. A plug sleeve according to claim 1 wherein one or more longitudinal grooves are present on the external wall of the plug sleeve, the grooves being of a length sufficient to extend from the bellows to the open end of the plug sleeve.
8. A plug sleeve according to claim 1, wherein a ledge is provided by offsetting or narrowing of the flexible bellows portion of the plug sleeve, wherein the ledge has one or more posts which extend longitudinally beyond the expanded length of the bellows.
9. A cap for a cosmetic container comprising:
a hollow housing having an inner wall and an outer wall; and
a hollow plug sleeve inserted within the cap, the plug sleeve having an open end, a closed end, an inner wall, and an outer wall, the closed end being a flexible bellows.
10. A cap according to claim 9, wherein the plug sleeve is composed of a plastic material.
11. A cap according to claim 10, wherein the plug sleeve is composed of polyethylene.
12. A cap according to claim 10, wherein the plug sleeve is composed of low density polyethylene.

13. A cap according to claim 9, wherein the plug sleeve has a smooth inner wall.
14. A cap according to claim 9, wherein one or more sealing rings are positioned on the inner wall of the plug sleeve between the open end and closed end.
15. A cap according to claim 9 wherein one or more longitudinal grooves are present on the external wall of the plug sleeve, the grooves being of a length sufficient to extend from the bellows to the open end of the plug sleeve.
16. A cap according to claim 9, wherein one or more longitudinal grooves are present on the inner wall of the cap, the grooves being of a length sufficient to extend from the bellows to the open end of the plug sleeve.
17. A cap according to claim 9, wherein a ledge is provided by offsetting or narrowing of the flexible bellows portion of the plug sleeve, wherein the ledge has one or more posts which extend longitudinally beyond the expanded length of the bellows.
18. An airtight cosmetic case comprising:
 - a base for receiving a stick-type product;
 - a hollow cap having an inner wall and an outer wall; and
 - a hollow plug sleeve inserted within the cap, the plug sleeve having an open end, a closed end, an inner wall, and an outer wall, the closed end being a flexible bellows.
- 5 19. A case according to claim 18, wherein a stick-type product is received in the base.
20. A case according to claim 19, wherein the stick product is a lipstick, lip balm, sunscreen, or deodorant.
21. A case according to claim 18, wherein the plug sleeve is composed of a plastic material.
22. A case according to claim 21, wherein the plug sleeve is composed of polyethylene.
23. A case according to claim 21, wherein the plug sleeve is composed of low density polyethylene.

24. A case according to claim 18, wherein the plug sleeve has a smooth inner wall.
25. A case according to claim 18, wherein one or more sealing rings are positioned on the inner wall of the plug sleeve between the open end and closed end.
26. A case according to claim 18, wherein one or more longitudinal grooves are present on the external wall of the plug sleeve, the grooves being of a length sufficient to extend from the bellows to the open end of the plug sleeve.
27. A case according to claim 18, wherein one or more longitudinal grooves are present on the inner wall of the cap, the grooves being of a length sufficient to extend from the bellows to the open end of the plug sleeve.
28. A case according to claim 18, wherein a ledge is provided by offsetting or narrowing of the flexible bellows portion of the plug sleeve, wherein the ledge has one or more posts which extend longitudinally beyond the expanded length of the bellows.

1/3

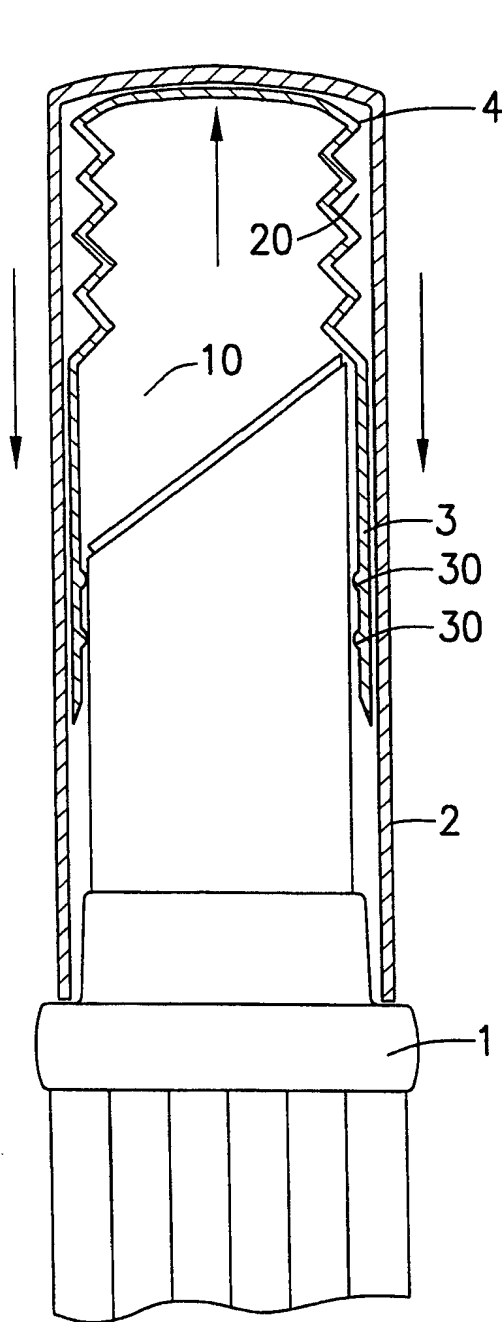


FIG. 1A

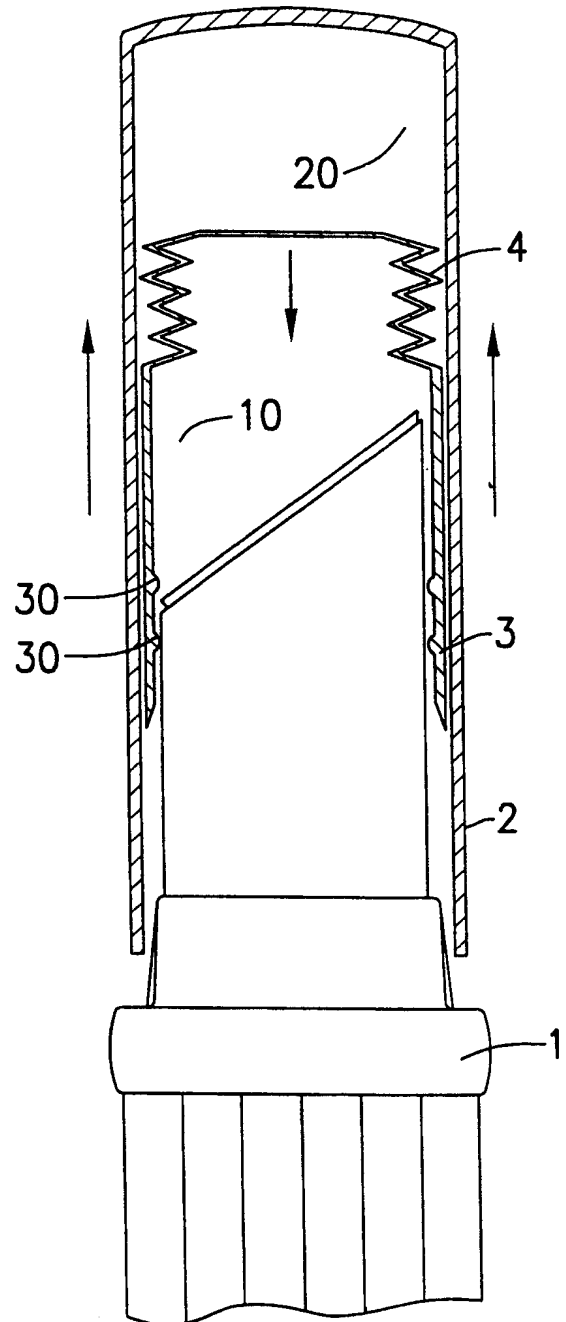


FIG. 1B

2/3

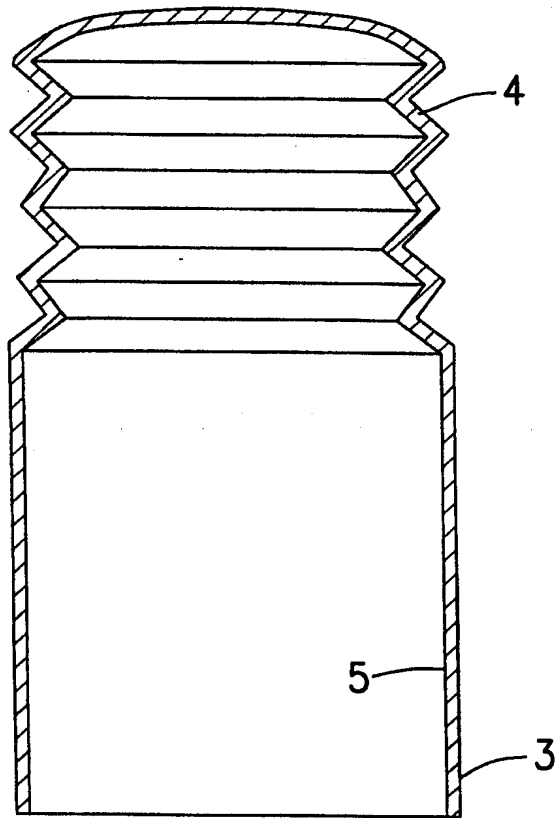


FIG. 2

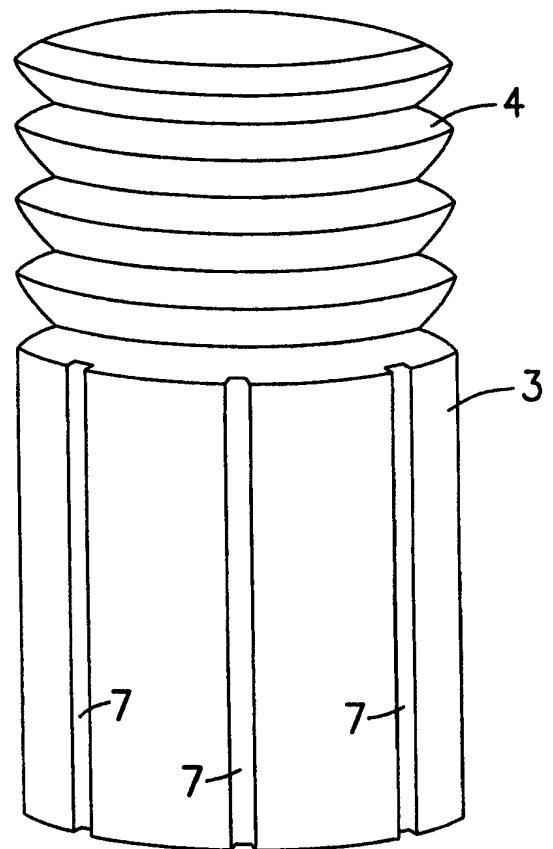


FIG. 3

3/3

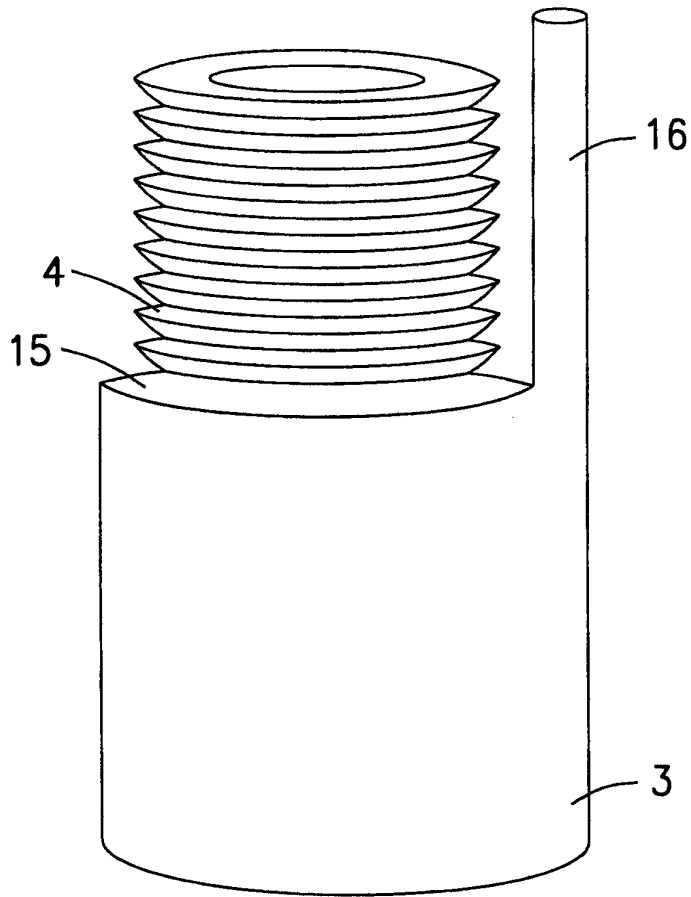


FIG. 4

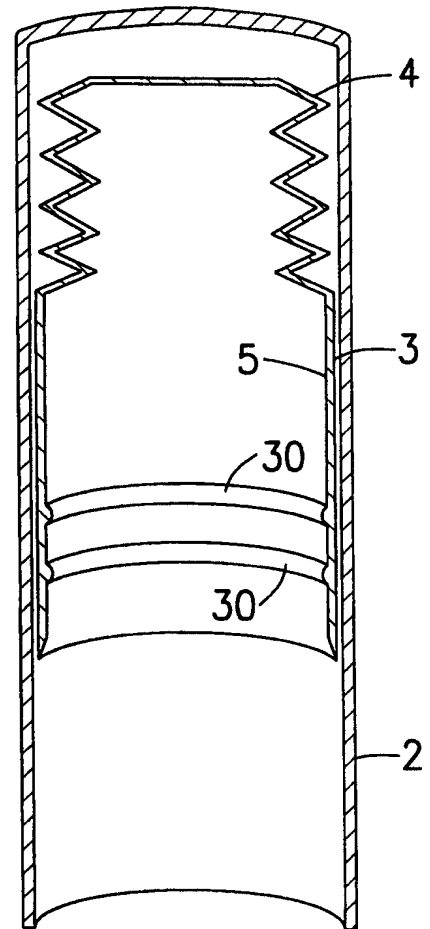


FIG. 5

INTERNATIONAL SEARCH REPORT

Internat'l Application No.
PCT/US 98/21933

A. CLASSIFICATION OF SUBJECT MATTER

A 45 D 40/18

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A 45 D, B 05 B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96/29906 A1 (REXAM COSMETIC PACKAGING) 03 October 1996 (03.10.96), the whole document.	1, 9, 18
A	Patent Abstracts of Japan, Vol. 98, No. 2, 30 January 1998; & JP, A, 09-267061 (SHISEIDO CO LTD), 14 October 1997.	

☐ Further documents are listed in the continuation of box C.

☐ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search
30 December 1998

Date of mailing of the international search report

24 02 1999

Name and mailing address of the ISA
European Patent Office, P.O. 5818 Patentlaan 2.
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

PIRKER e.h.

ANHANG

zum internationalen Recherchen-
bericht über die internationale
Patentanmeldung Nr.

In diesem Anhang sind die Mitglieder
der Patentfamilien der im obenge-
nannten internationalen Recherchenbericht
angeführten Patentdokumente angegeben.
Diese Angaben dienen nur zur Unter-
richtung und erfolgen ohne Gewähr.

ANNEX

to the International Search
Report to the International Patent
Application No.

PCT/US 98/21933 SAE 212405

This Annex lists the patent family
members relating to the patent documents
cited in the above-mentioned inter-
national search report. The Office is
in no way liable for these particulars
which are given merely for the purpose
of information.

ANNEXE

au rapport de recherche inter-
national relatif à la demande de brevet
international n°

La présente annexe indique les
membres de la famille de brevets
relatifs aux documents de brevets cités
dans le rapport de recherche inter-
national visée ci-dessus. Les renseigne-
ments fournis sont donnés à titre indica-
tif et n'engagent pas la responsabilité
de l'Office.

In Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets	Datum der Veröffentlichung Publication date Date de publication
WO A1 9629906	03-10-96	EP A1 817580 JP T2 10507674 US A 5533823	14-01-98 28-07-98 09-07-96
JP A2 9267061	14-10-97	keine - none - rien	

